

MODEL 1826-7-DBL-IS

Holding & Transport Cabinets



UL Listed to Canadian safety standards
Classified by UL to NSF Std. #4

Specifications

Wittco Model 1826-7-DBL-IS heated holding and transport cabinets feature two (2) separately controlled compartments in one (1) full size cabinet. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid). Each compartment has a recessed control panel containing dual indicator light, thermometer, and full range thermostat for temperatures up to 190°F (88°C). Individual compartment capacity is 7 each 18" x 26" sheet pans, 14 each 12" x 20" x 2½" steam table pans, or a combination of both on 3" centers. Each compartment comes with 5 pairs of universal tray slides adjustable on 1½" centers. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted push/pull handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Welded tubular steel frame for maximum strength. Lifetime warranty on heating elements. Complete with cord and plug: NEMA 5-20 for 120 volts and NEMA 6-20 for 208-240 volts. 120 Volts, 1,000 Watts, 8.3 Amps per compartment

Standard Features




- Holding and Transport Cabinet with two (2) compartments. Each compartment has the following capacity
 - 7 each 18" x 26" sheet pans
 - 14 each 12" x 20" x 2½" pans
 - Or a combination of both on 3" centers
- Blower motor for gentle and even temperature distribution
- 5" Heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted push/pull handles
- Two (2) recessed control panels
- Two (2) dual indicator
- Two (2) thermometers
- Two (2) full range thermostats for temperatures up to 190°F (88°C)
- 5 Pairs of universal tray slides adjustable on 1½" centers per compartment
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 1½" in side walls and 2" in top
- Welded tubular steel frame for maximum strength
- Magnetic action door latches
- Lifetime warranty on heating elements
- Complete with cord and plug: NEMA 5-20 for 120 volts and NEMA 6-20 for 208-240 volts
- 120 Volts, 1,000 Watts, 8.3 Amps per compartment

Options

- Left hand hinged door
- Additional universal tray slides
- Humidity pan
- Full perimeter bumper
- Cord wrap
- Glass Doors

Approved by: _____

Date: _____

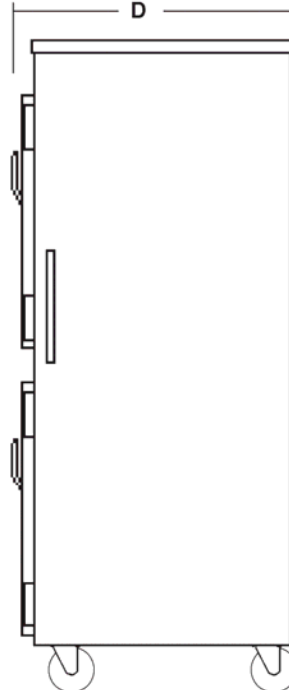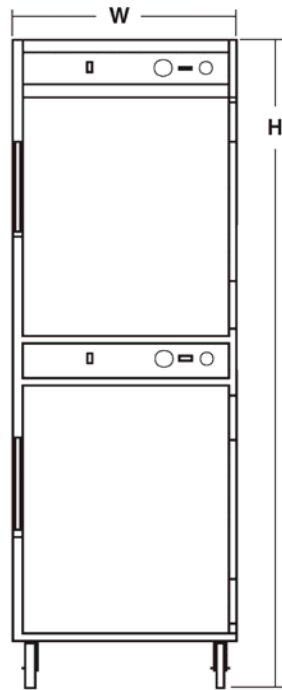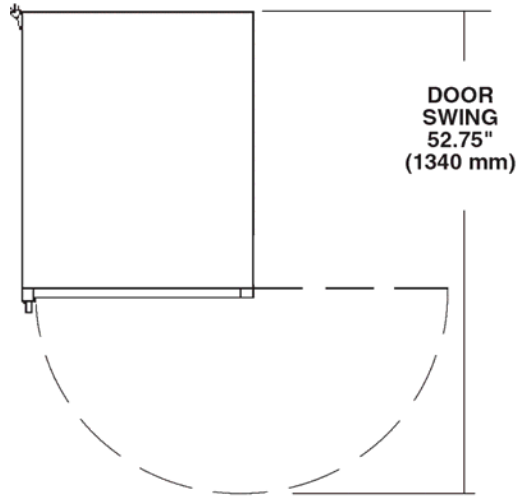

Model No	Capacity Per Compartment 12 "x20 "x2½ "	Capacity Per Compartment 18 "x26 "	High	Deep	Wide	Shipping Weight	Volts Per Compartment	Watts Per Compartment	Amps Per Compartment
1826-7-DBL-IS	14	7	72.5 " 1852mm	31.75 " 807mm	24.75 " 629mm	342# 155kg	120	1000	8.3

Note: In line with its policy to continually improve its products, Wittco Foodservice Equipment reserves the right to change materials and specifications without notice.

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

414-354-3080 800-367-8413 FAX 414-354-2821